

PRODUCT DATASHEET

DULUX S/E 11 W/830

OSRAM DULUX S/E | Short CFLni, with 4-pin base for ECG operation



AREAS OF APPLICATION

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Improved maintenance
- Low power consumption (7 W, 9 W, 11 W)
- Long service life
- Extremely low profile

PRODUCT FEATURES

- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index $R_a: \geq 80$
- Dimmable (3...100 %)
- Short and compact pin-base lamps with single-turn tubes
- Single-ended four-pin plug-in 2G7 base
- Operates on battery, solar and AC power with suitable electronic control gear



TECHNICAL DATA


Electrical data

Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated wattage	11.80 W
Nominal wattage	11.00 W
Nominal current	0.155 A

Photometrical data

Nominal luminous flux	900 lm
Luminous flux at 25 °C	900 lm
Rated luminous flux	900 lm
Rated color temperature	3000 K
Color rendering index Ra	≥80
Light color (designation)	LUMILUX Warm White
Color temperature	3000 K
Luminous flux	900 lm
Color rendering index Ra	≥80

Dimensions & weight



Diameter	11.0 mm
Overall length	212.0 mm
Length	214.0 mm
Length acc. to IEC standard	215 mm
Length with base excl. base pins/connection	214.00 mm
Outer bulb	T11

Lifespan

Nominal lamp life time	20000 h
Rated lamp life time	20000 h

Service life	13000 h ¹⁾
Lifespan	20000 h ¹⁾

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	2G7
Mercury content	1.3 mg
Product remark	For ECG operation only


Capabilities

Dimmable	Yes
----------	-----

Country-specific categorizations



ILCOS	FSDH-11/830-/P/-2G7
-------	---------------------

Light Distribution

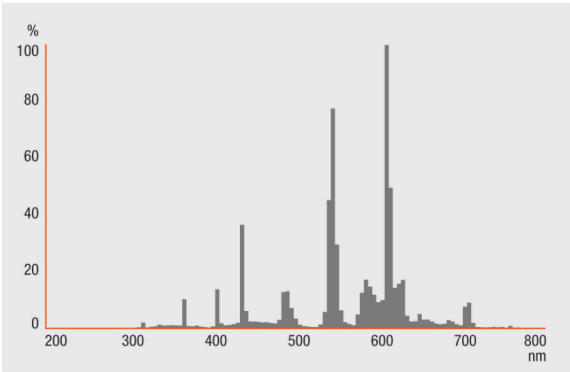

Spectral power distribution

Wiring Diagram

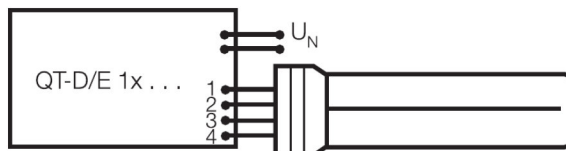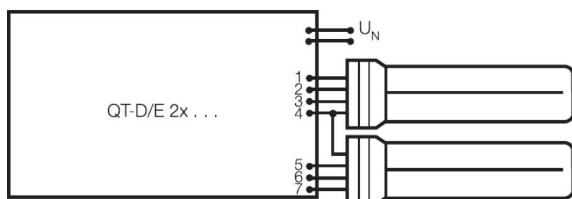

Wiring diagram


Wiring diagram

EQUIPMENT / ACCESSORIES

- Suitable for operation on electronic control gear

SAFETY ADVICE

In case of lamp breakage: www.ledvance.com/brokenlamp



Others graphics

LOGISTICAL DATA