



# MSR Gold™ SA Double Ended

## MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General information		Correlated Color Temperature (Nom)		7500 K
Cap-Base	SFC-11 [ SFC-11]	Luminous Efficacy (rated) (Nom)	73 lm/W	
Operating Position	UNIVERSAL [ Any or Universal (U)]	Color Rendering Index (Nom)	75	
Main Application	Entertainment	<b>Operating and electrical</b>		
Life to 50% Failures (Nom)	750 h	Power (Nom)	575 W	
System Description	SA/2 DE	Lamp Current (Nom)	7 A	
<b>Light technical</b>		Ignition Supply Voltage (Min)	198 V	
Color Code	2	<b>Controls and dimming</b>		
Luminous Flux (Min)	39000 lm	Dimmable	No	
Luminous Flux (Nom)	42000 lm			
Chromaticity Coordinate X (Nom)	294			
Chromaticity Coordinate Y (Nom)	317			

# MSR Gold™ SA Double Ended

Mechanical and housing	
Cap-Base Information	SFC-11
Luminaire design requirements	
Pinch Temperature (Max)	400 °C
Product data	
Full product code	872790091464100
Order product name	MSR Gold™ 575 SA/2 DE 1CT/40

EAN/UPC - Product	8727900914641
Order code	928175105114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	928175105114
Net Weight (Piece)	0.032 kg



## Dimensional drawing

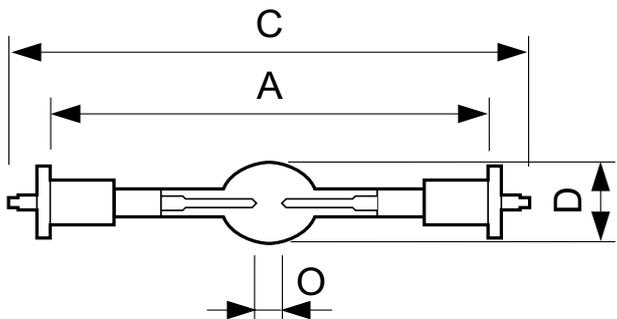

MSR Gold™ 575 SA/2 DE 1CT/40

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE 1CT/40	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm

## Photometric data

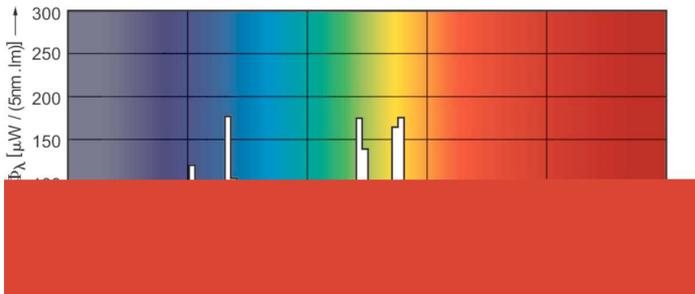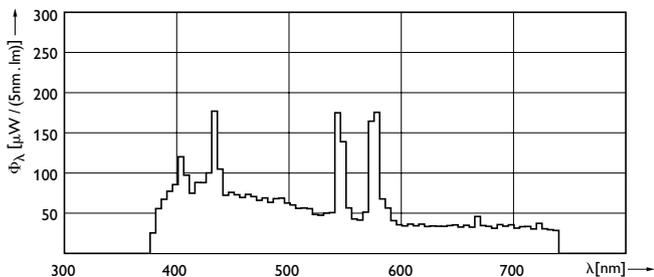

XDPB\_XDMSR\_575W\_SA2-DE-Spectral power distribution B/W

