

QT-ECO T/E 2X18/220...240

QUICKTRONIC ECONOMIC | ECG for FL 7 mm and CFL



Product benefits

- Automatic restart after lamp replacement

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...254 V
- Line frequency: 50 Hz
- Automatic shutdown of defective lamps and at end of life (EoL)
- Safety: to EN 61347-2-3
- RI suppression: to EN 55015:2006+A1:2007+A2:2009/CISPR 15
- Line harmonics: to EN 61000-3-2
- Immunity: to EN 61547

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
DC voltage	176...254 V
Operating frequency	45 kHz ¹⁾
Max. no. of ECGs on circuit breaker 10 A	35
Max. no. of ECGs on circuit breaker 16 A	56

¹⁾ Approximately


Light technical data

Starting time	2.0 s ¹⁾
---------------	---------------------

¹⁾ Preheat start: After a switch off, the lamps should remain switched off for 2 minutes to ensure an optimum preheat start

Dimensions & weight

Length	150.0 mm
Width	41.0 mm
Height	28.0 mm
Mounting hole spacing, length	140.0 mm
Product weight	180.00 g

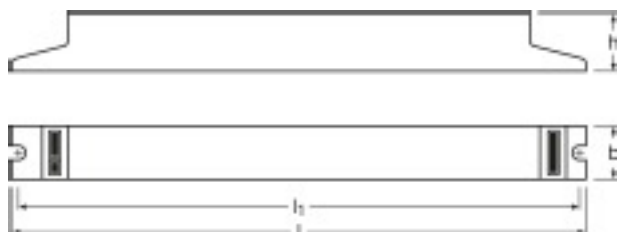

Product line drawing with letters

Temperatures


Ambient temperature range	-15...+50 °C
---------------------------	--------------

Capabilities

Dimmable	No
Suitable for fixtures with prot. class	I
End of Life safety shutdown	EOL T.2

Certificates & standards

Approval marks – approval	VDE
EEI – Energy Label	A3
Standards	acc. to EN 61347-2-3 / acc. to EN 55015:2006 + A1:2007 / acc. to EN 61000-3-2 / acc. to EN 61547

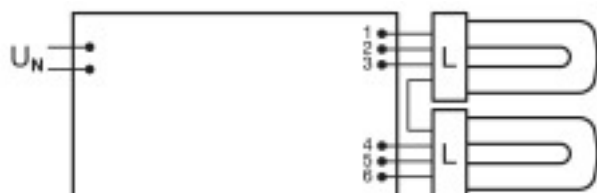

Wiring diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300803982	Unpacked 1	28 mm x 40 mm x 149 mm	177.60 g	0.17 dm ³
4050300803999	Shipping carton box 50	171 mm x 165 mm x 425 mm	9276.00 g	11.99 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.