

# PRODUCT DATASHEET

## DULUX S 9 W/840

OSRAM DULUX S | Short CFLni, with 2-pin base for CCG operation



### AREAS OF APPLICATION

- Ideal for cost-effective creative illumination and decoration
- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

### PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Extremely low profile
- Long service life
- Improved maintenance

### PRODUCT FEATURES

- Color rendering index  $R_a : \geq 80$
- Short and compact pin-base lamps with single-turn tubes
- Single-ended two-pin plug-in G23 base



## TECHNICAL DATA



### Electrical data

Nominal voltage	60 V
Rated wattage	9.10 W
Nominal wattage	9.10 W
Nominal current	0.17 A

### Photometrical data

Nominal luminous flux	600 lm
Luminous flux at 25 °C	600 lm
Rated luminous flux	600 lm
Rated color temperature	4000 K
Color rendering index Ra	≥80
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.78
Rated LLMF at 6,000 h	0.76
Rated LLMF at 8,000 h	0.75
Light color (designation)	LUMILUX Cool White
Color temperature	4000 K
Luminous flux	600 lm
Color rendering index Ra	≥80

### Dimensions & weight

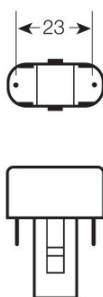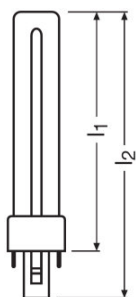

Diameter	12.0 mm
Overall length	166.5 mm
Length	168.0 mm
Length acc. to IEC standard	145 mm
Length with base excl. base pins/connection	144.00 mm
Outer bulb	T12

Maximum diameter	11.0 mm
------------------	---------

### Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Service life	6500 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h <sup>1)</sup>

<sup>1)</sup> With CCG/LLCG

### Additional product data

Base (standard designation)	G23
Mercury content	1.6 mg

### Capabilities

Dimmable	No
----------	----


### Certificates & standards

Energy consumption	12 kWh/1000h
Energy efficiency class	G

### Country-specific categorizations


ILCOS	FSD-9/840-I-G23
-------	-----------------

## Light Distribution

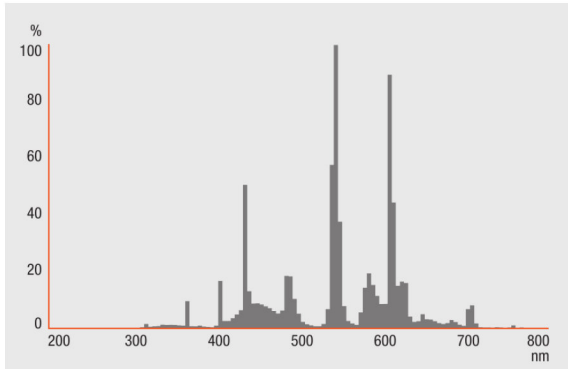


Spectral power distribution

## Wiring Diagram

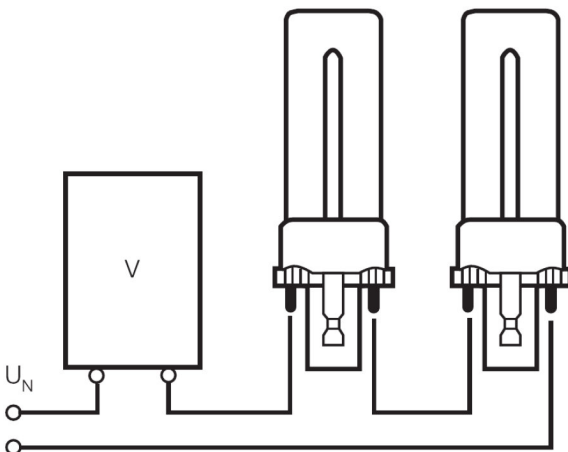

Wiring diagram

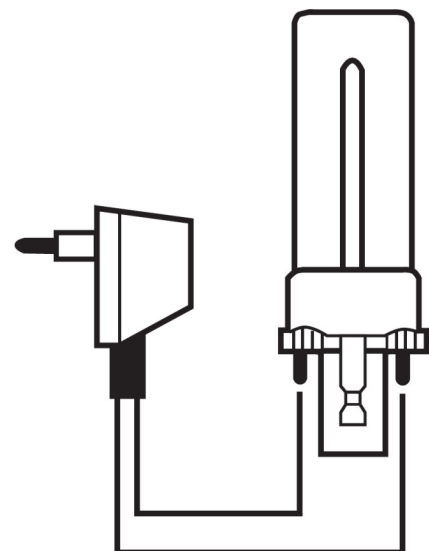

Wiring diagram