

# PRODUCT DATASHEET

## DULUX D 10 W/827

OSRAM DULUX D | CFLni, 2 tubes, with 2-pin base for CCG operation



---

### AREAS OF APPLICATION

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

---

### PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance

---

### PRODUCT FEATURES

- Color rendering index  $R_a : \geq 80$
- Short and compact pin-base lamp with double-turn tubes
- Single-ended two-pin plug-in G24d base



## TECHNICAL DATA



### Electrical data

Rated wattage	10.00 W
Nominal wattage	10.00 W

### Photometrical data

Nominal luminous flux	600 lm
Luminous flux at 25 °C	600 lm
Rated luminous flux	600 lm
Rated color temperature	2700 K
Color rendering index Ra	≥80
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.78
Rated LLMF at 6,000 h	0.76
Rated LLMF at 8,000 h	0.75
Light color (designation)	LUMILUX INTERNA
Color temperature	2700 K
Luminous flux	600 lm
Color rendering index Ra	≥80

### — Dimensions & weight



Diameter	11.0 mm
Overall length	108.0 mm
Length	110.0 mm
Length acc. to IEC standard	95 mm
Length with base excl. base pins/connection	87.00 mm
Outer bulb	T11
Maximum diameter	11.0 mm

## Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Service life	6500 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h <sup>1)</sup>

<sup>1)</sup> With CCG/LLCG

## Additional product data

Base (standard designation)	G24d-1
Mercury content	1.3 mg

## Capabilities

Dimmable	No
Suitable for indoor	Yes


## Certificates &amp; standards

Energy consumption	13 kWh/1000h
Energy efficiency class	B

## Country-specific categorizations


ILCOS	FSQ-10/827-I-G24d-1
-------	---------------------

## Light Distribution

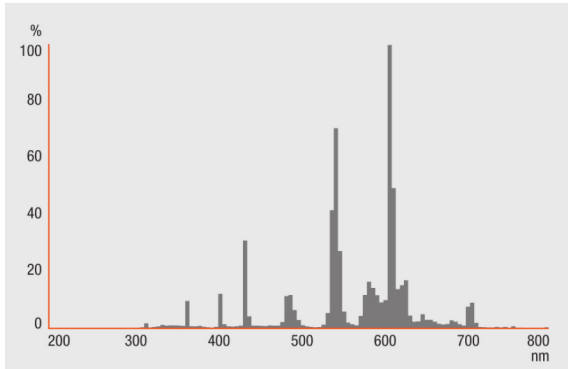


Spectral power distribution

## Wiring Diagram

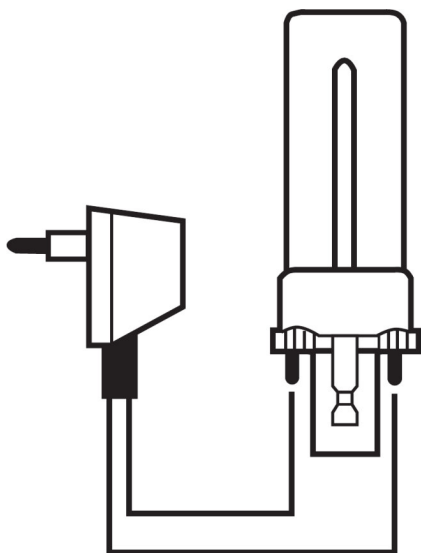

Wiring diagram

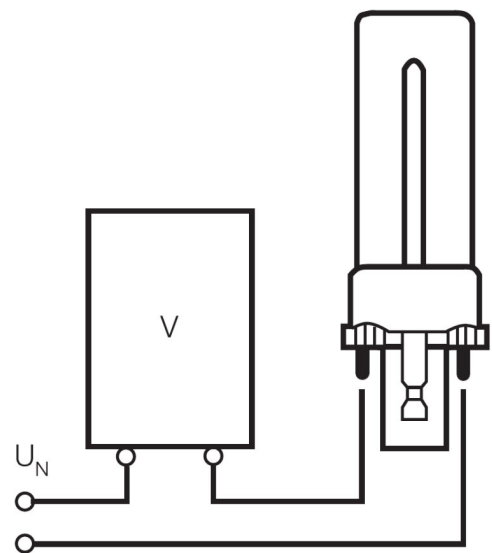

Wiring diagram

---

**EQUIPMENT / ACCESSORIES**

- Suitable for operation on conventional control gear

---

**SAFETY ADVICE**

In case of lamp breakage: [www.ledvance.com/brokenlamp](http://www.ledvance.com/brokenlamp)

---

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300008110	Folding carton box 1	35 mm x 35 mm x 118 mm	42.60 g	0.14 dm <sup>3</sup>
4050300238432	Shipping carton box 10	186 mm x 133 mm x 93 mm	478.00 g	2.30 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.